



Dados Mecânicos (Motores com capacitor de partida e/ou permanente)


Carcaças 63 até 90S

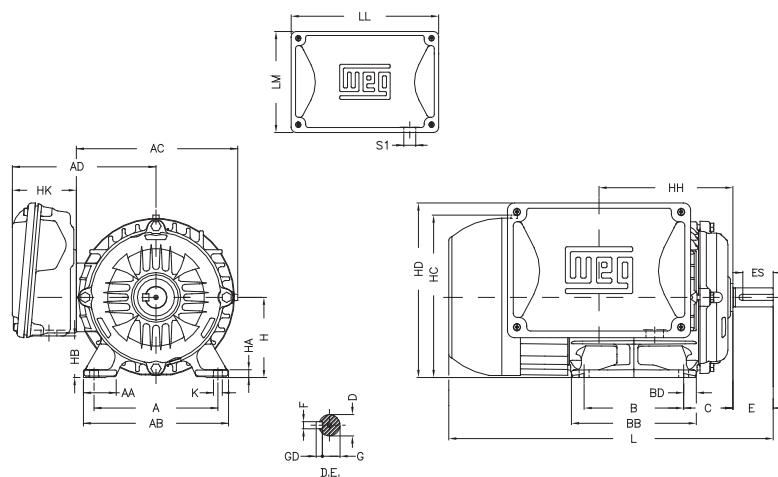

Carcaças 90L até 112

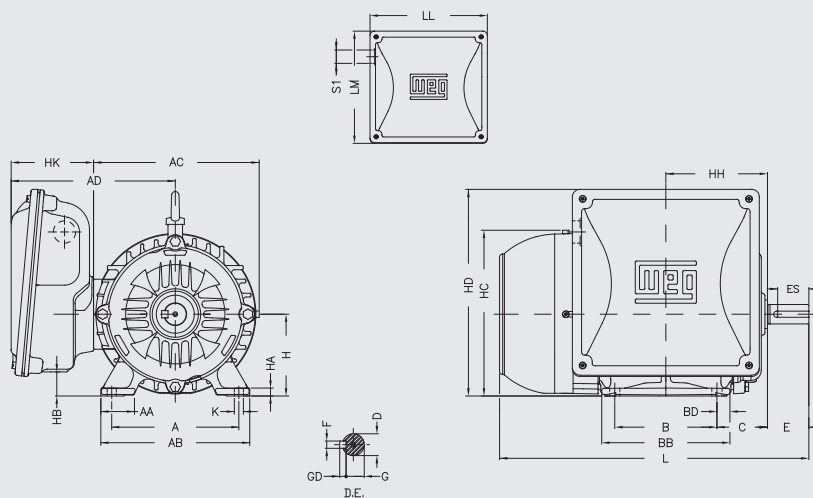

Carcaça 132

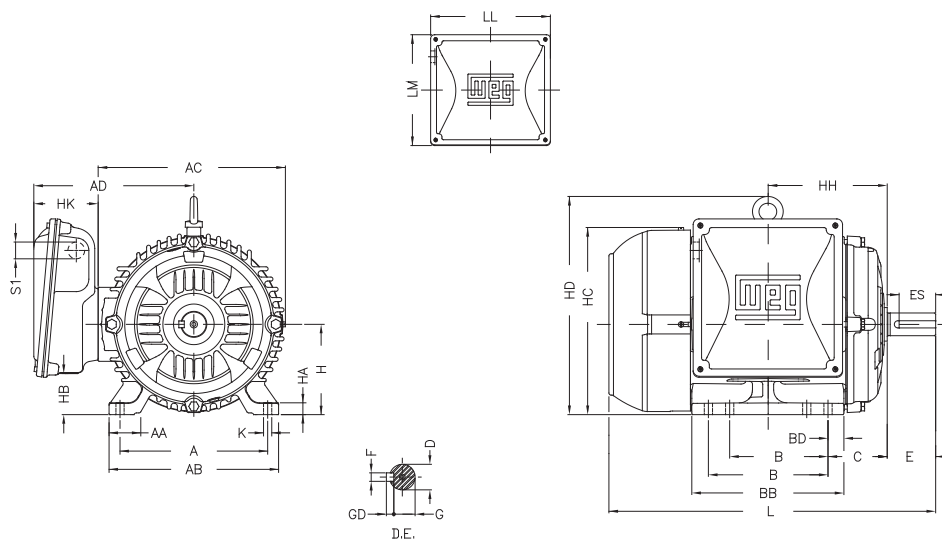


Carcaça	A	AA	AB	AC	AD	B	BB	BD	C	Eixo					
										D	E	ES	F	G	GD
63	100	26	116	129	128	80	95	7.5	40	11j6	23	14	4	8,5	4
71	112	29	132	145	136	90	114	11.75	45	14j6	30	18	5	11	5
80	125	31	149	163	145	100	126	12.75	50	19j6	40	28	6	15,5	6
90S	140	37	164	182	155		131	15.5	56	24j6	50	36	8	20	7
90L					181	125	156								
100L	160	40	188	203	191	140	173	16.5	63	28j6	60	45	10	24	8
112M	190	41	220	226	206		177	18.5	70						
132S	216	46	248	274	234	140	187	23.5	89	38k6	80	63	10	33	8
132M						178	225								
132M/L						178/203	250								

Carcaça	H	HA	HB	HC	HD	HH	HK	K	L¹	L²	LL	LM	S1	Rolamentos	
														Dianteiro	Traseiro
63	63	7	23	130	156	115	65	7	256	216	184	135	1xM20	6201 ZZ	6201 ZZ
71	71		31	145	164	125			293	250				6202 ZZ	6202 ZZ
80	80	8	41	163	174	135		10	326	277				6204 ZZ	6203 ZZ
90S	90	9	45	182	178	141			334	305				6205 ZZ	
90L		26	227	154	91	12	358	329	221	206	1xM25	6206 ZZ	6206 ZZ		
100L	100	10	43	205			244	168	418	-	6206 ZZ				
112M	112	16	40	226	280	179	423	-	246	232	1xM32	6207 ZZ			
132S	132		60	274	319	198	451	-	246/286³						
132M						217	489	-							
132M/L						229	514	-							


1) Para motores com capacitor de partida ou partida+ permanente
2) Para motores com capacitor permanente
3) Cota 286 mm para motores com 15 cv 2 polos / 10 e 12,5 cv 4 polos

Flange “FF”

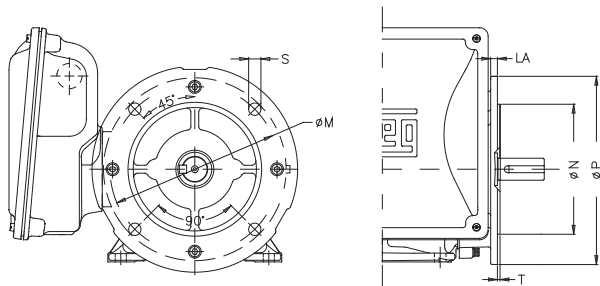


Flange "FF"									
Carcaça	Flange	LA	M	N	P	S	T	α	Nº de furos
63	FF-115	5,5	115	95	140	10	3	45°	4
71	FF-130	7	130	110	160		3,5		
80	FF-165	9	165	130	200	12			
90		10							
100	FF-215	12,5	215	180	250	15	4		
112									
132	FF-265	12	265	230	300				

Flange “C-DIN”

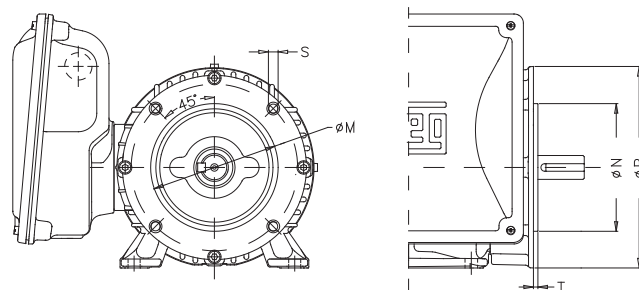

Flange "C-DIN"								
Carcaça	Flange	M	N	P	S	T	α	Nº de furos
63	C-90	75	60	90	M5	2.5	45 °	4
71	C-105	85	70	105	M6			
80	C-120	100	80	120	M8	3		
90	C-140	115	95	140				
100	C-160	130	110	160		3.5		
112								
132	C-200	165	130	200	M10			

Flange “C-NEMA”

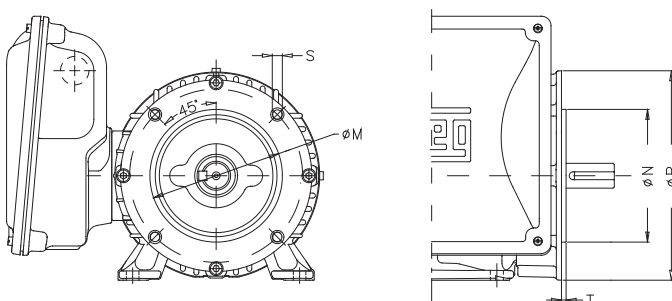

Flange "C-NEMA"								
Carcaça	Flange	M	N	P	S	T	α	Nº de furos
63	FC-95	95.2	76.2	143	UNC 1/4"x20	4	45°	4
71								
80								
90	FC-149	149.2	114.3	165	UNC 3/8"x16	4	45°	4
100								
112								
132	FC-184	184.2	215.9	225	UNC 1/2"x13	6.3		